
Merchandise Express™ Kit 03

ME-K-03

Merchandise Express™ is a portable point of purchase display system that features simple black metal frames, lighting, pegboards and push-fit fabric graphics to deliver products and messaging with an impact! Convenient rolling carry bags make transportation easy.

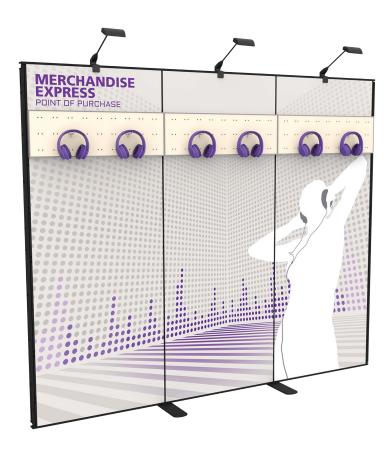

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- NFW
- 9½'w full height straight backwall
- Black metal frames with support feet
- One rolling carry bag and one accessory bag included
- Kit includes: frame, 3 fabric graphic panels, 3 Lumina 200 LED lights and 3 pegboards
- One year limited hardware warranty against manufacturers defects

dimensions:

differisions.	
Hardware	Graphic
Assembled unit: 113.94" w x 94.92" h x 23.622" d 2894mm(w) x 2411mm(h) x 600mm(d) Approximate weight: 110.6 lbs / 50.17 kgs	Total visual area: Graphic Panels A, B and C: 36.875"w x 93.25"h Please be sure to include a 2" bleed around the perimeter.
Shipping	Refer to related graphic template for more information.
Shipping dimensions – ships in one box: 53"l x 18"h x 16"d 1346mm(l) x 457mm(h) x 406mm(d)	Visit: www.exhibitors-handbook.com/ graphic-templates
Approximate shipping weight: 120 lbs / 54.4 kgs	
additional information:	
Optional a la carte accessories: Shelf Full Kit 1 (1 Shelf):	Graphic material: dye-sublimated fabric Max weight per pegboard =

BME1-SHLF-FK1

Shelf Full Kit 2 (2 Shelves): BME1-SHLF-FK2

Pegboard Full Kit 1 (1 Pegboard): BME1-DSPLY-PNL-FK1

Pegboard Full Kit 2 (2 Pegboards): BME1-DSPLY-PNL-FK2

Accessory Combo Kit (1 Shelf & 1 Pegboard): BME1-ACC-CMB

Monitor Bracket Full Kit: BME1-MB

Max weight per pegboard = 10 lbs / 4.5 kgs


Lumina 200 LED - 25 LED watts

*Kit does not include products.

Hard case options available for shipping. Call your sales representative today for more information.

Parts Included:

Qty	Description
6	Horizontal bar (HZ-BAR)
3	Hanging bar (HNG-BAR)
4	Vertical pole top (VPL-T)
2	Vertical pole bottom for foot (VPL-BTM)
2	Vertical pole bottom with raised pad (VPL-BTM-RP)
2	Foot
3	Pegboard Kit
3	Spot Light Connector

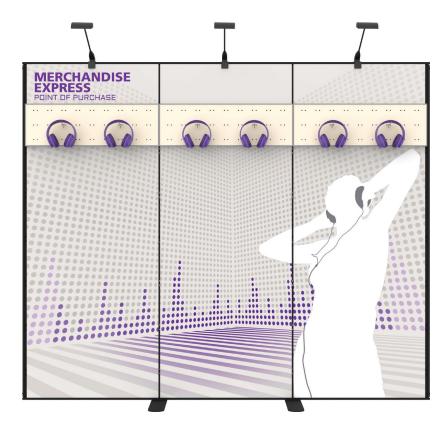

ASSEMBLED VIEW

Packing Solution:

Hard case options available for shipping. Call your sales representative for more information. Below are lists of content per carry bag and accessory bag.

Rolling Carry Bag: - all vertical posts


Accessory Bag: - all horizontal bars

- all hanging bars
- feet
- accessories




TOP VIEW

Step 1: Assemble Outside Posts
Assemble right outside post by sliding top vertical post (VPL-T) to bottom vertical post (VPL-BTM-RP.) Repeat for left outside post.

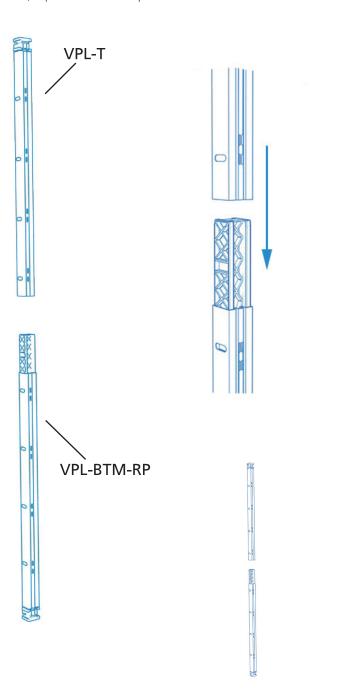


Step 2: Attach Feet to Center Posts
To attach the vertical pole bottom (VPL-BTM) to foot, lift the lever on the post and slide onto the foot. Then, push the lever down and lock the post onto the foot.

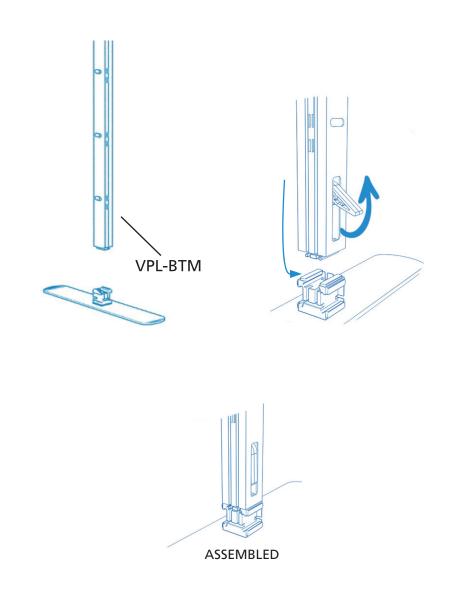


Step 3: Assemble Center Vertical Posts

Connect left center post by sliding top vertical post (VPL-T) to bottom vertical post with foot (VPL-BTM.) Repeat for right center post.

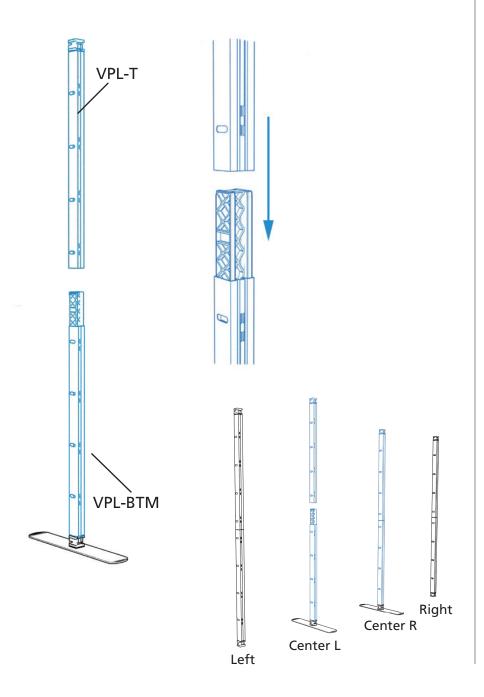


Step 4: Attach Top and Bottom Bars

Attach top and bottom horizontal bars of frame to vertical posts. First, line up the horizontal bar (HZ-BAR) with the bottom left vertical post and with the center vertical post. Lift the lever on the horizontal bar (HZ-BAR) and slide onto the left vertical post. Then, push the lever down to lock. Secure the bottom horizontal bar (HZ-BAR) by locking to the center vertical post. Repeat on top and bottom for each panel.

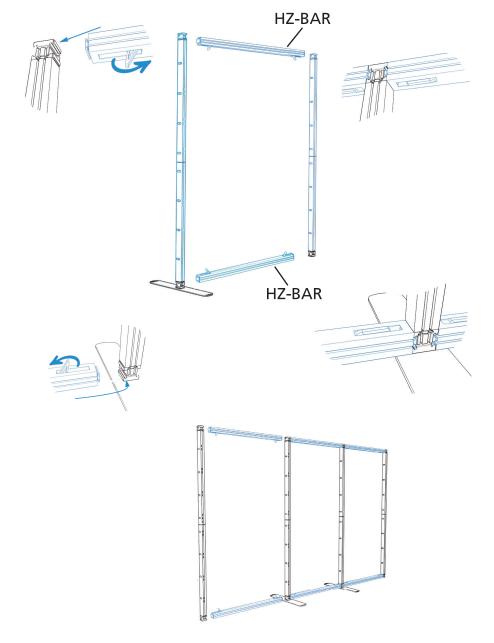


Step 5: Attach Center Support BarFor support, hang the center support bar (HNG-BAR) in each panel. Attach support bars by connecting in vertical post notches. Repeat for each panel. Stagger the center support bars across kit.






Step 6: Apply Graphics
Install graphics by folding the graphic over the silicone edge. Start by inserting graphic into each corner of each panel. Graphic inserts into inside channels on the right and left sides and the outside channel on top and bottom. Then push the graphic into the channel around the perimeter of the frame. Assure each graphic is tightly inserted. When taking graphics off, take care to gently pull by attached pull tab.

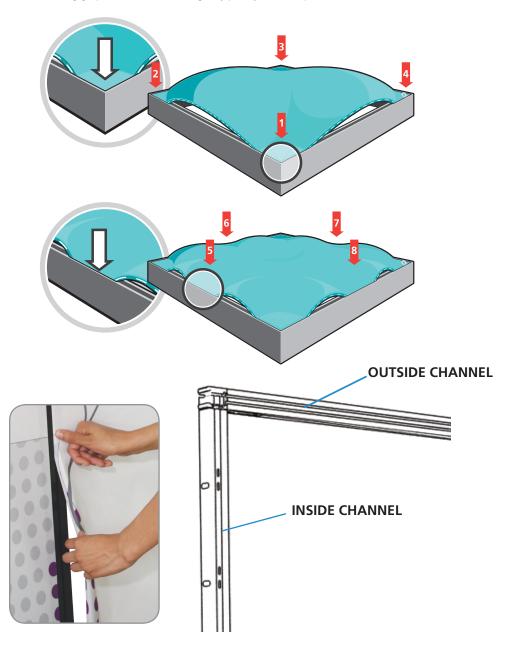

Step 7: Attach Lighting
To attach lighting, slide light connector onto the top horizontal bar (HZ-BAR) at desired location. Then, slide LUM 200 LED light onto the dovetail on top of the connector.

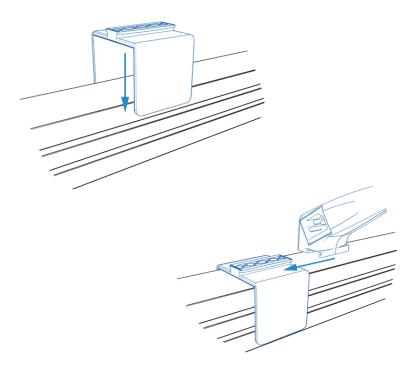

Step 8: Attach Pegboards
Attach pegboards by connecting to vertical post notches at desired height location.
Repeat for each pegboard.

